

H-201288

1/9

FIG. 1

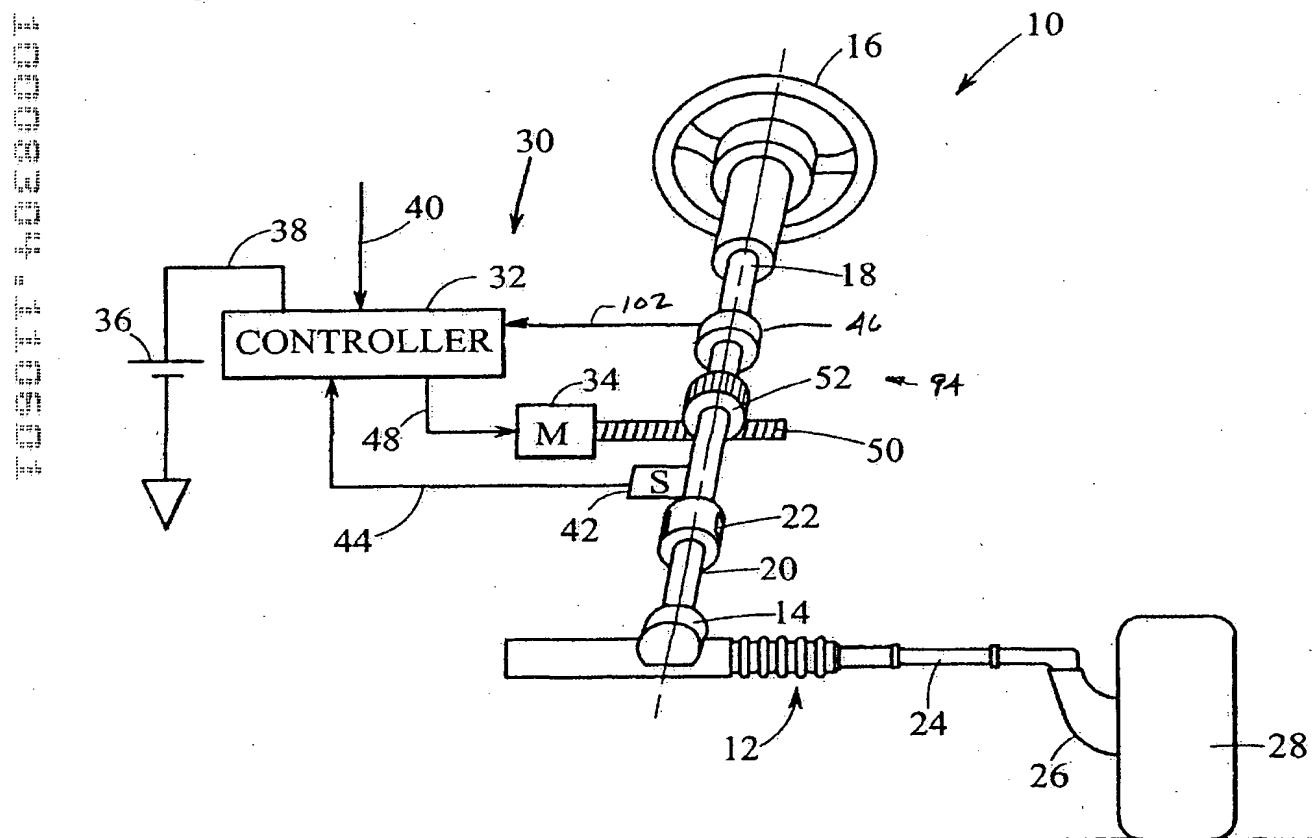


Fig. 2A

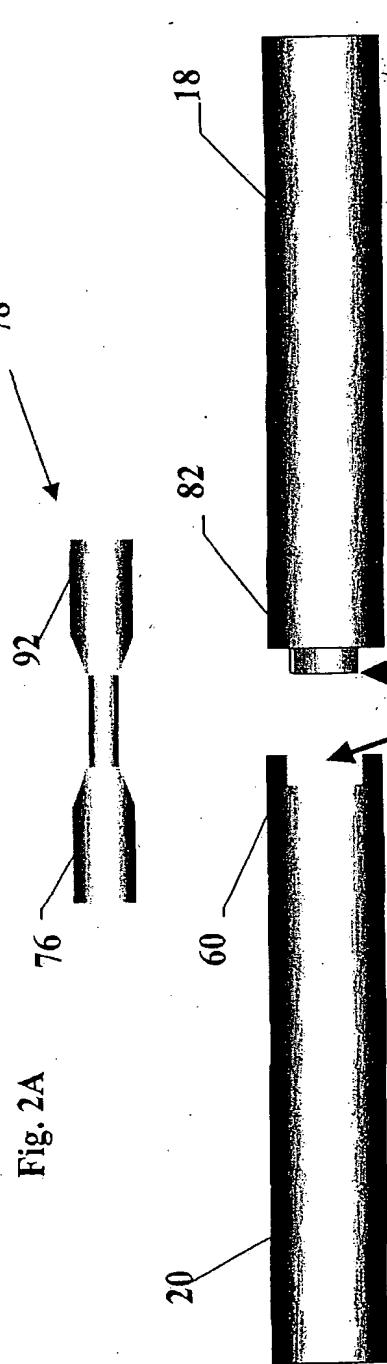


Fig. 2B

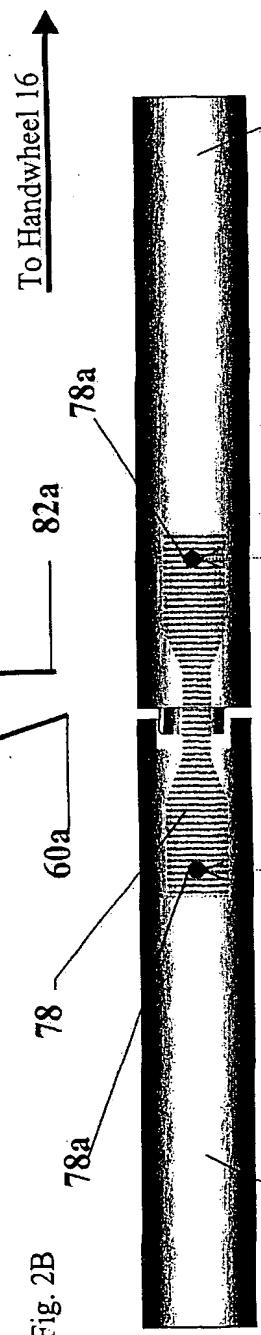


Fig. 2C

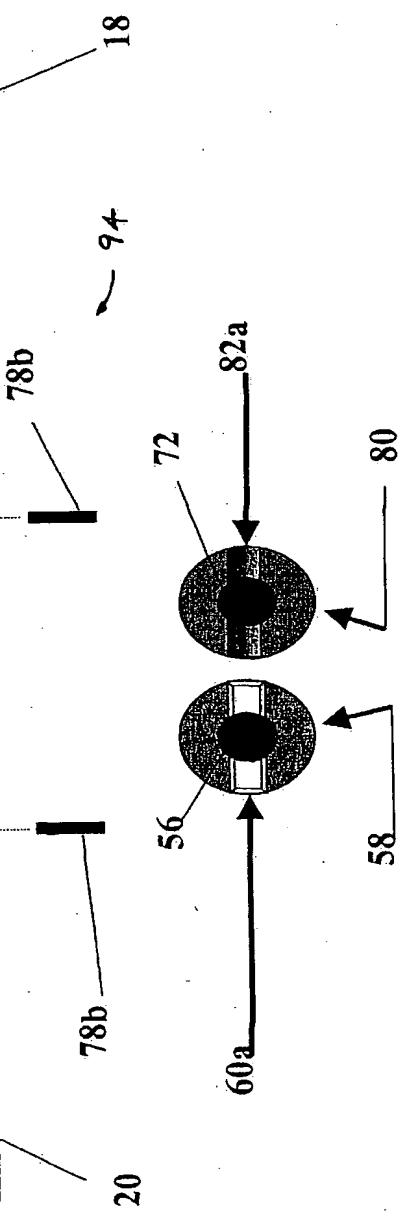



Fig. 2D


H-201288

3/9

46


FIG. 3

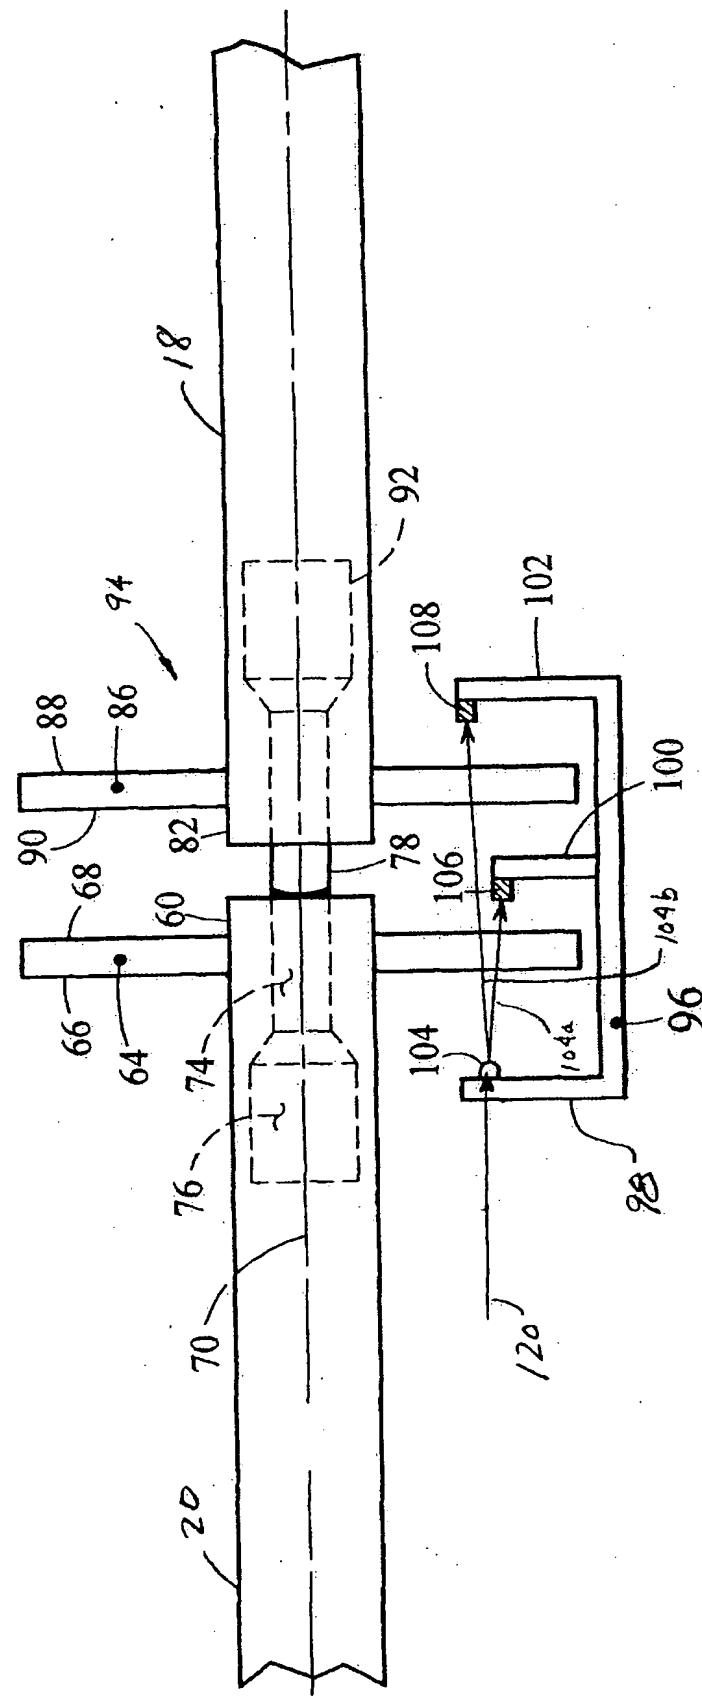

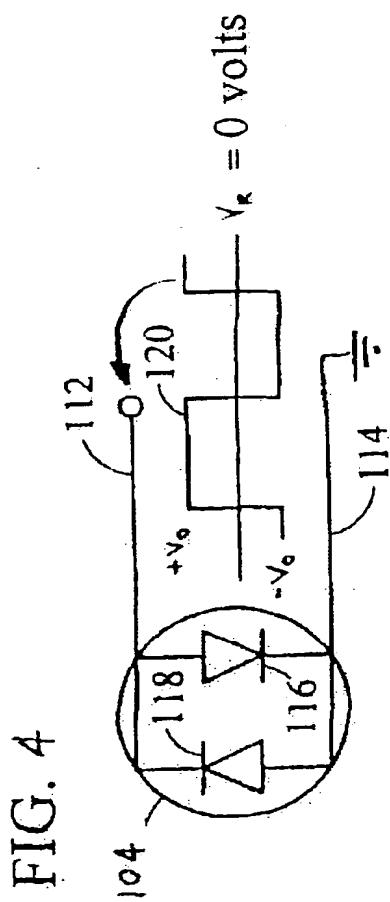

H-201288

5/9

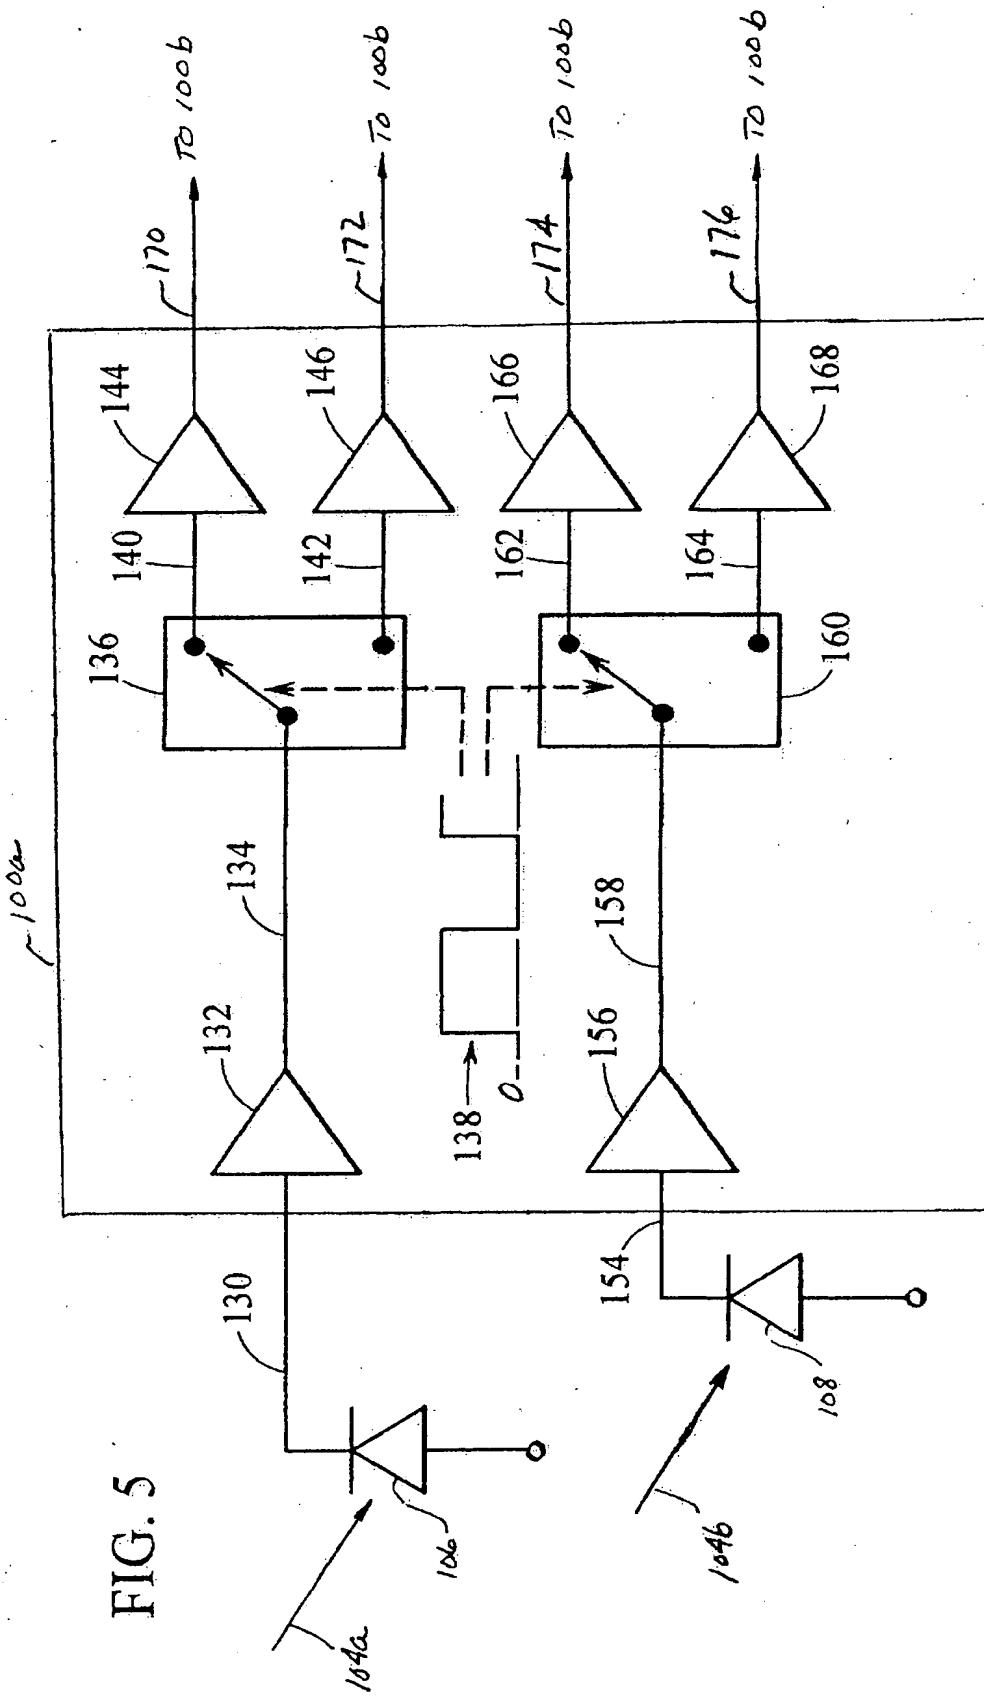

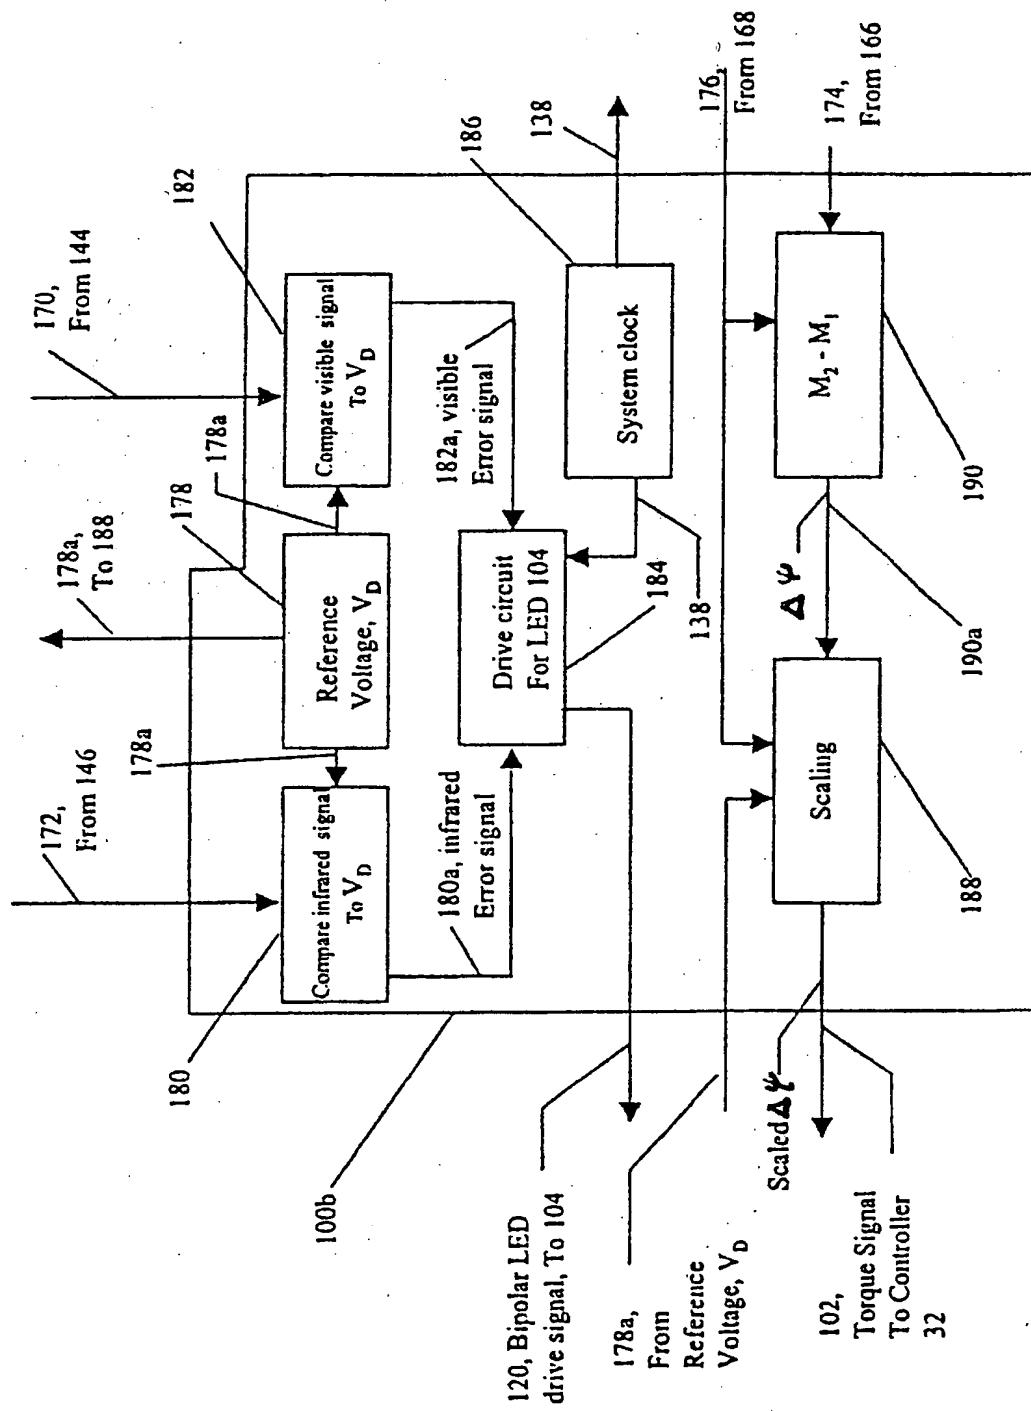


Figure 6

A Method And Apparatus For Correcting For
Attenuation In An Optical Torque Sensor

H-201288

7/9

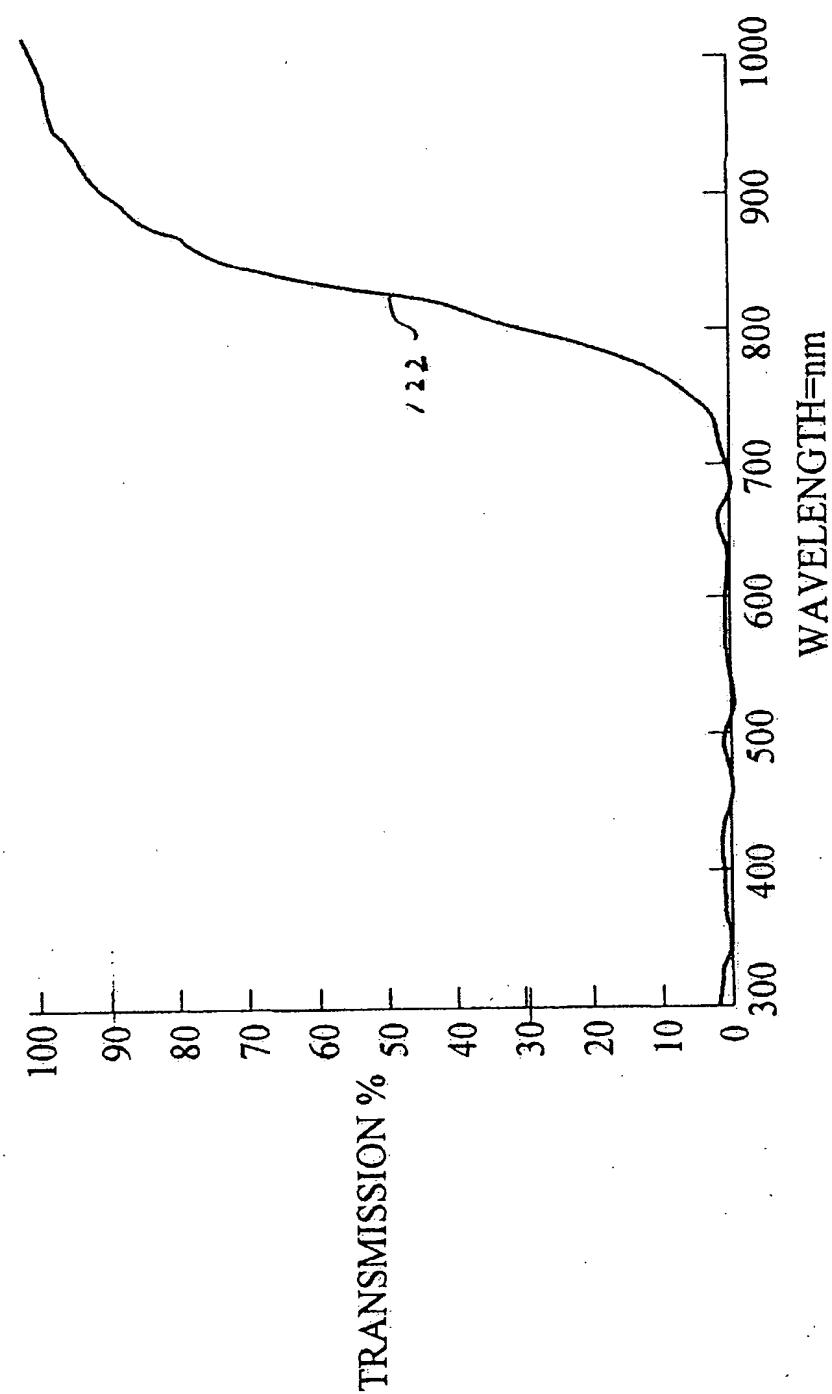


FIG. 7

H-201288

8/9

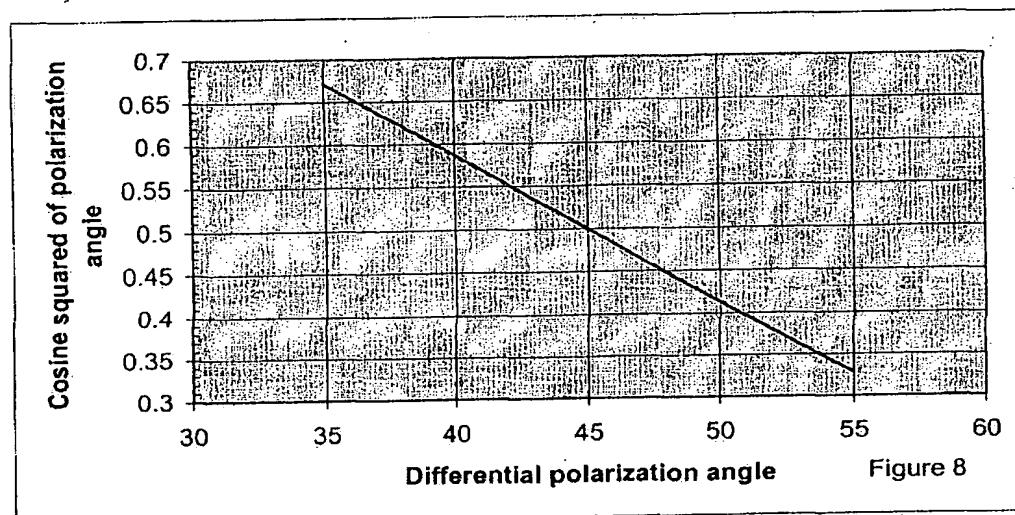


FIG. 8

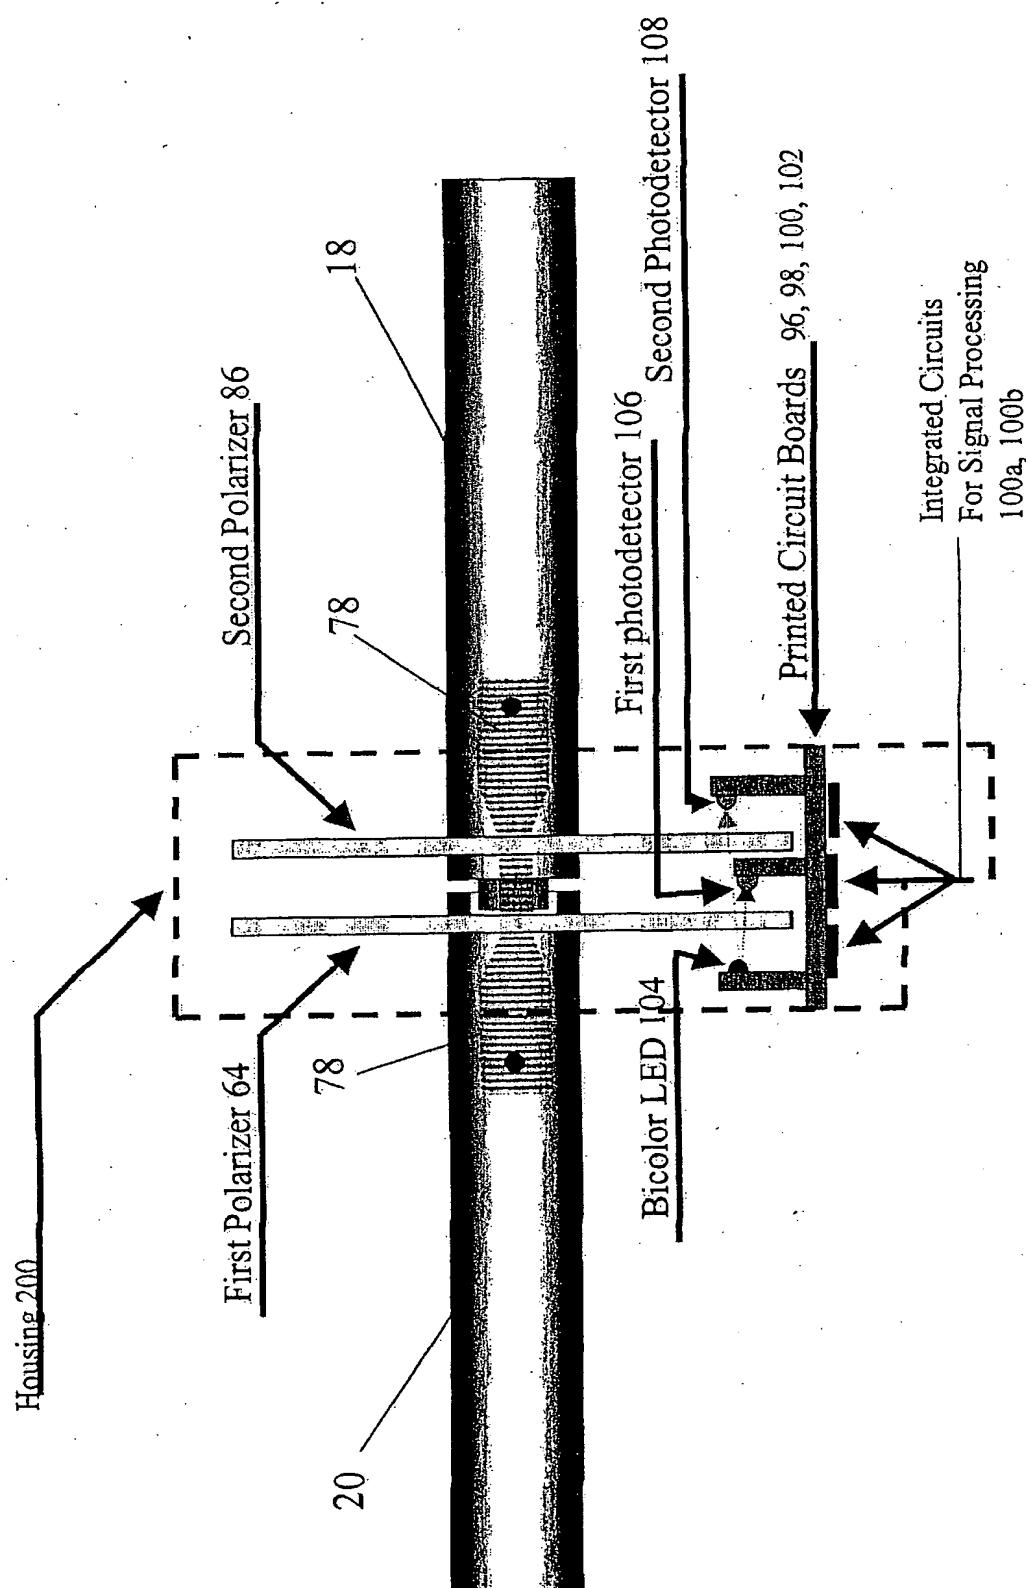


Figure 9